

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:


PLB205X 1/4 Turn Straight Stop – CPVC x Compression
Use: For use only in potable water distribution systems, hot and cold, in accessible locations only

Part Listing:

- ☐
- PLB205X B 1/2" nom CPVC x 3/8" OD compression, chrome plated, bulk




PART DIMENSIONS (Inches)					
Model	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E
PLB205X	1.77	1.12	1.64	2.66	.94

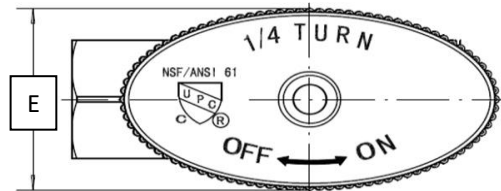

Operating Specifications	
Temperature	Pressure
40°- 160° F	125 PSI maximum

STOP MATERIAL SPECIFICATIONS	
Body	Brass, plated
Stem	Brass
Ball	Brass, plated
Seats	PTFE
O-ring	Rubber
Handle	ABS, plated
Handle Screw	Stainless steel
Compression Nut	Brass, plated
Compression Sleeve	Brass
Adaptor	Brass, plated

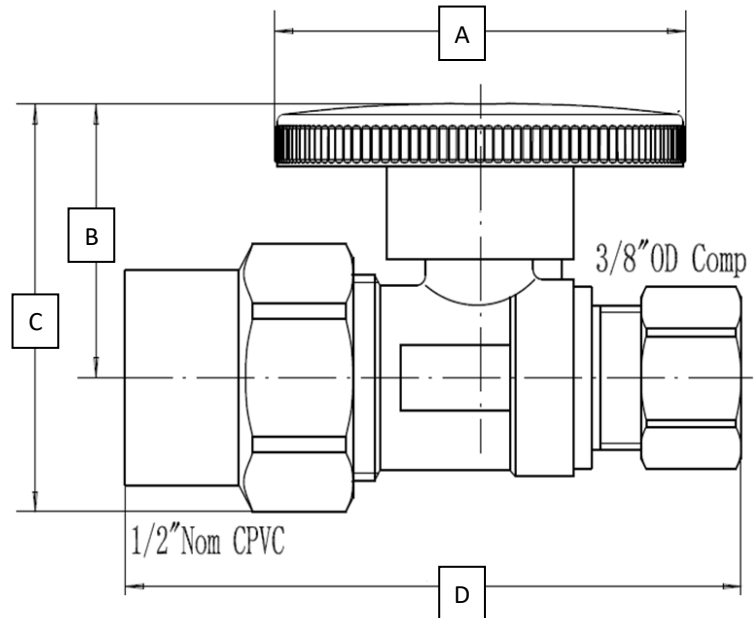
Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

400.291 PLB205X 1/4 Turn Straight Stop – CPVC x Comp REV 6.21

PLUMBSHOP®

©2021 BrassCraft Manufacturing Company