Product Submittal Form

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

PSPCST64 Push Connect Slip Tee

Use: For use only in potable water distribution systems, hot and cold applications

Part Listing:

- ☐ PSPCST64-10X P 1/2" push connect, all 3 ends, bagged
- ☐ PSPCST64-14X P 3/4" push connect, all 3 ends, bagged

Design Features:

- ○ Allows for quick repairs up to 2" of copper or CPVC
- ○ Compatible with copper, PEX, or CPVC
- ○ No soldering, clamps, unions, or glue required
- ○ Removable
- ○ Used in wet or dry installations
- ○ Approved for behind the wall and underground use*
- ○ Includes removal tool
- ○ 25 year limited warranty

PART DIMENSIONS *(Inches)*			
Model	***DIM. A***	***DIM. B***	***DIM. C***
PSPCST64-10X	27.1	43.25	121.6
PSPCST64-14X	34.2	53.7	128.5

Operating Specifications	
Temperature	***Pressure***
33°- 180° F	200 PSI maximum

MATERIAL SPECIFICATIONS	
Body	*Low lead brass*
Oring	*EPDM*
Backer Ring	*Polypropylene*
Gripper Ring	*Stainless Steel*
Removal Flange	*Polypropylene*
Tube Support	*POM*

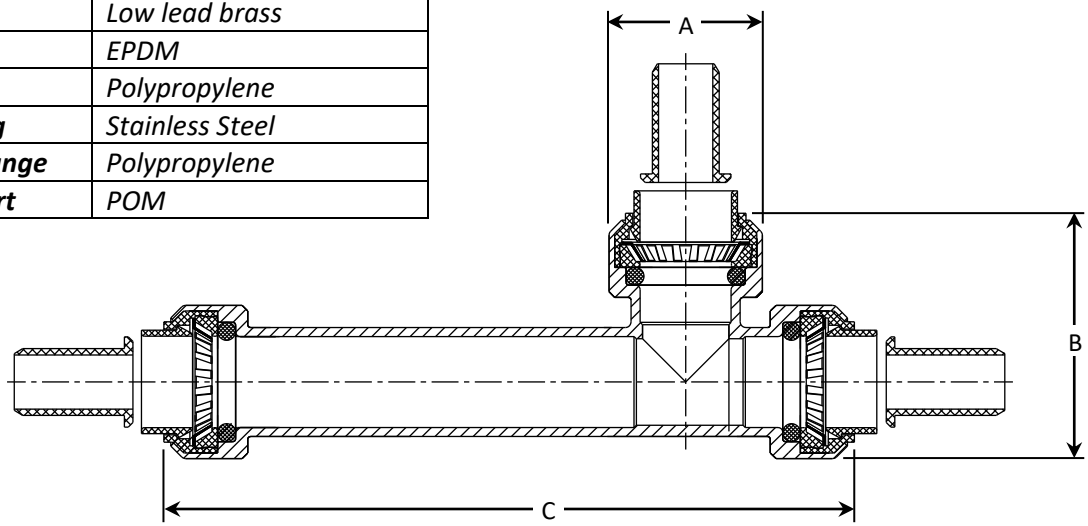

*Please consult with local code for final approval

Listings & Certifications:

- IAPMO listed to ASSE1061

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

PLUMBSHOP®

©2019 Brasscraft Manufacturing Company